




MARINE INTERIOR EQUIPMENT CEILINGS




SEC 
SYSTEMS 

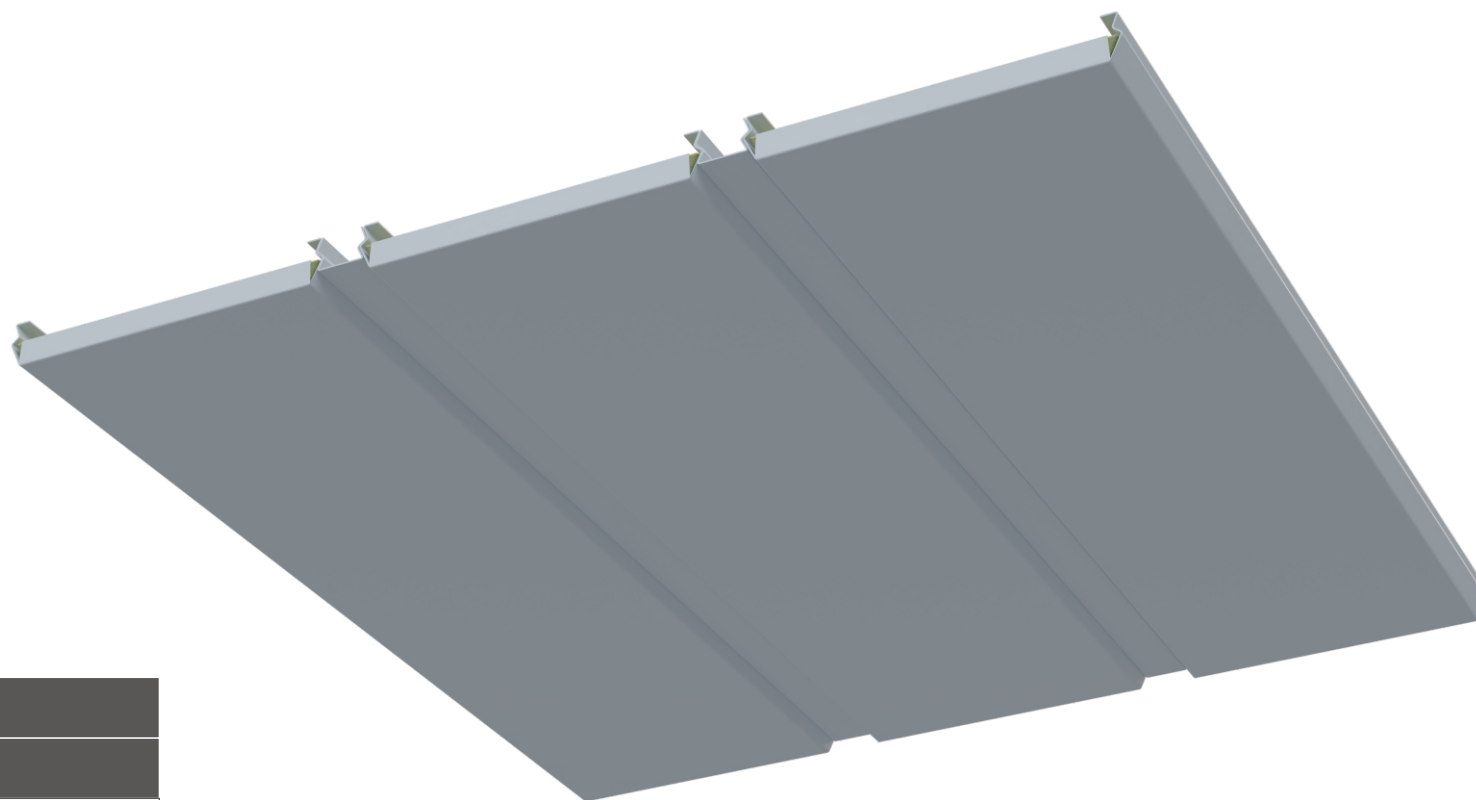


STRIP PANEL	
MODEL	B13-302
DESCRIPTION	
Type	
Fire class	C
Standard width	300 mm
Module length	up to 3000 mm
Thickness	29,50 mm
Weight	7,69 kg/m ²
Sound reduction	n/a
Insulation	110 kg/m ³
Visible surface	PVC or powder coated*, stainless steel
Application	Ceiling Metal, quick assembly/disassembly

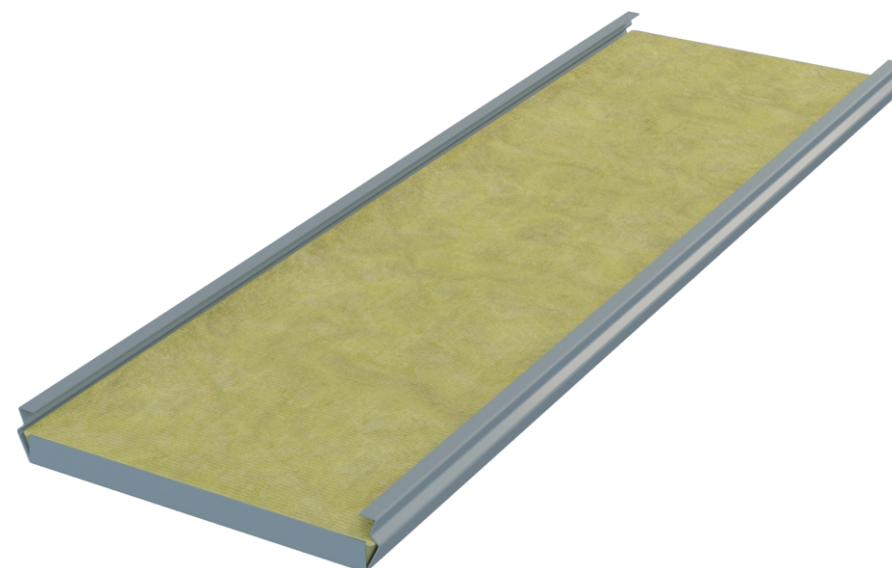


* According to RAL or NCS colors

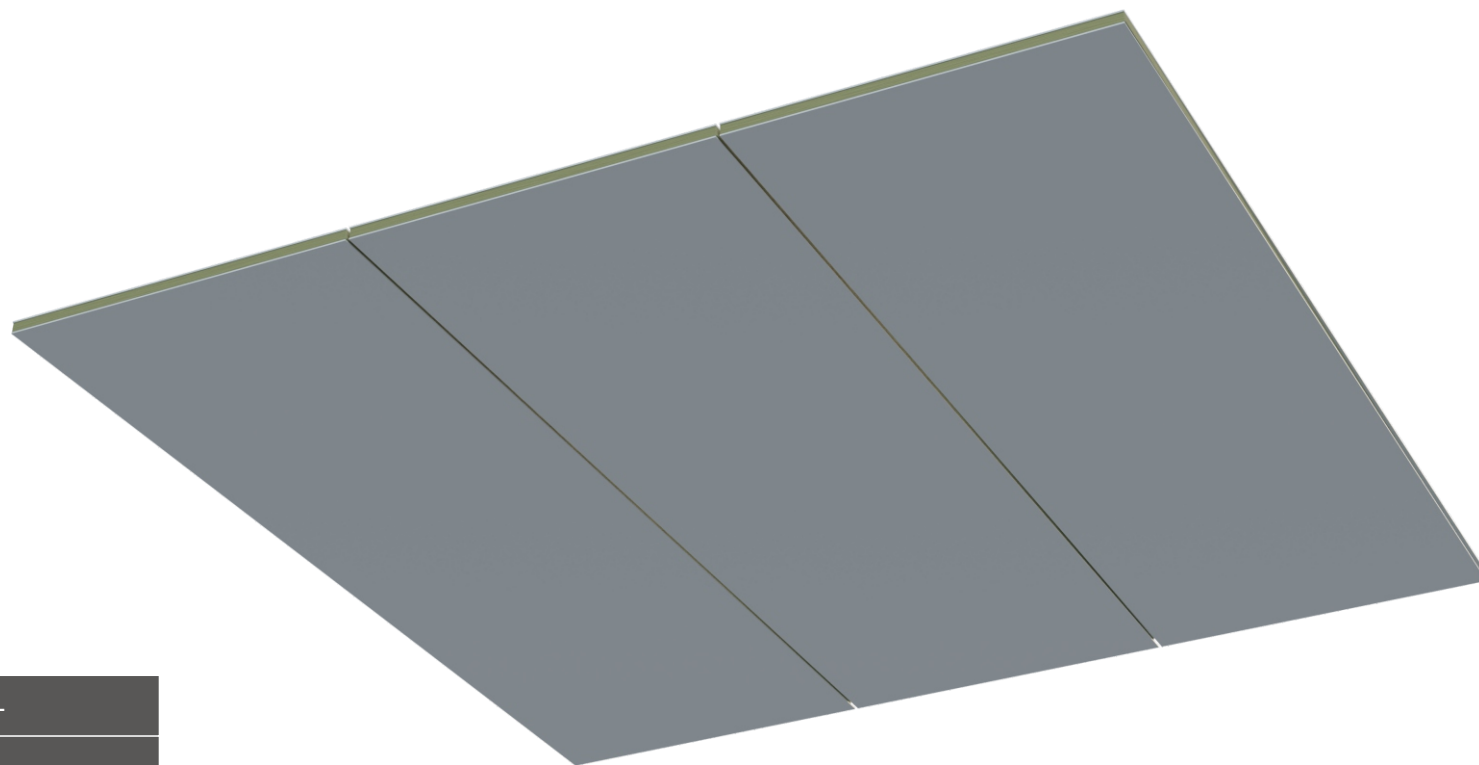


MINERAL PANEL	
MODEL	M12/C
DESCRIPTION	
Type	P121-611
Fire class	C
Standard width	600 mm
Module length	up to 1200 mm
Thickness	12 mm
Weight	8,5 kg/m ²
Sound reduction	n/a
Insulation	640 kg/m ³
Visible surface	HPL
Application	Ceiling Mineral core

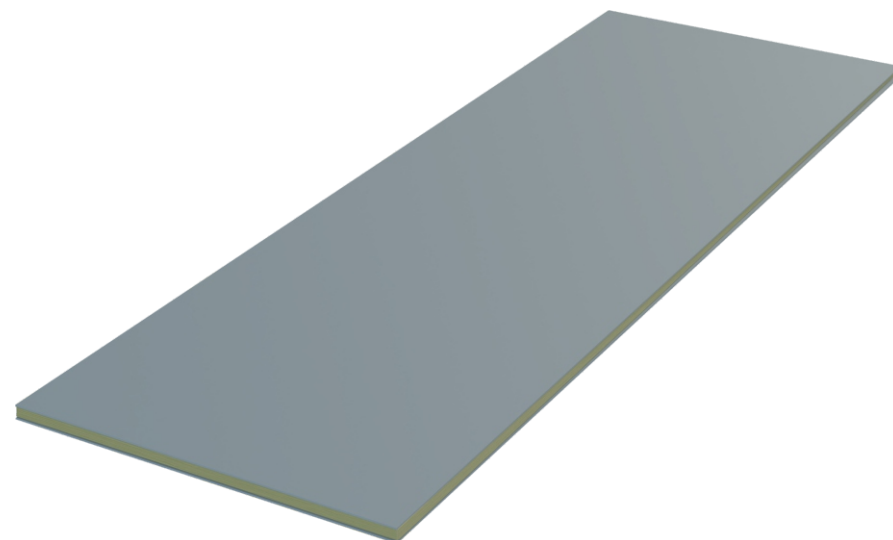


* According to RAL or NCS colors

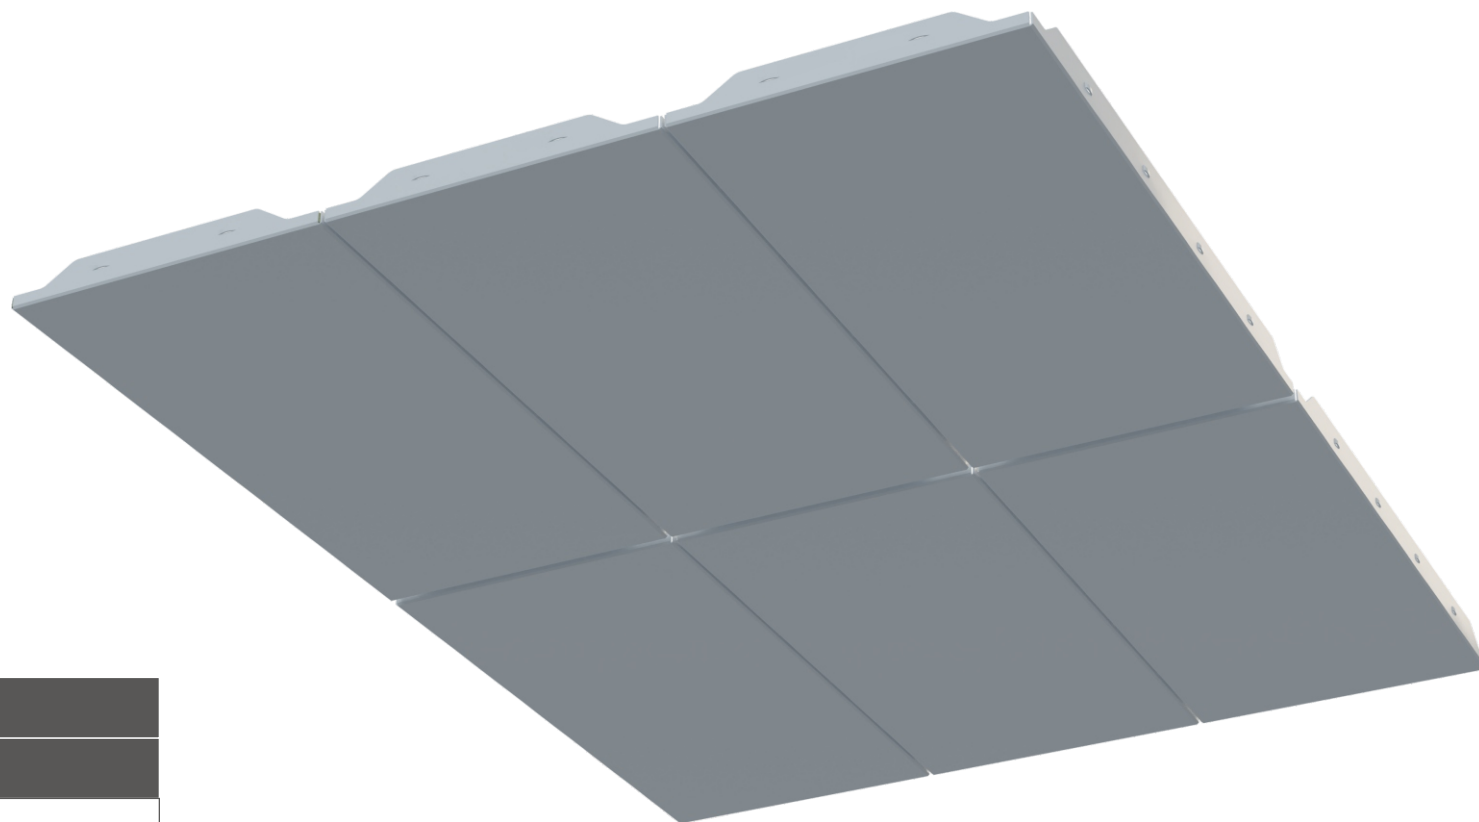


TILE PANEL	
MODEL	B11-613
DESCRIPTION	
Type	
Fire class	C
Standard width	750 mm
Module length	up to 900 mm
Thickness	30 mm
Weight	5.66 kg/m ²
Sound reduction	n/a
Insulation	45 kg/m ³
Visible surface	PVC or powder coated*, stainless steel
Application	Ceiling Metal, quick assembly/disassembly

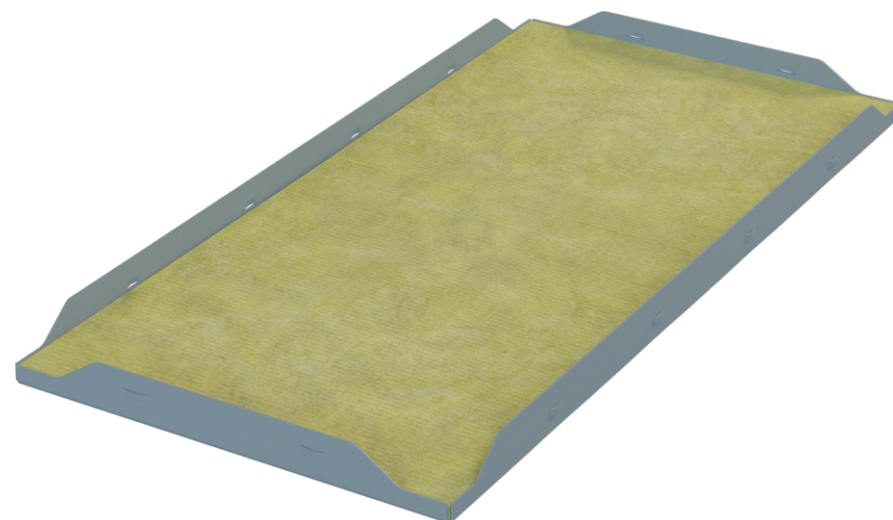


* According to RAL or NCS colors

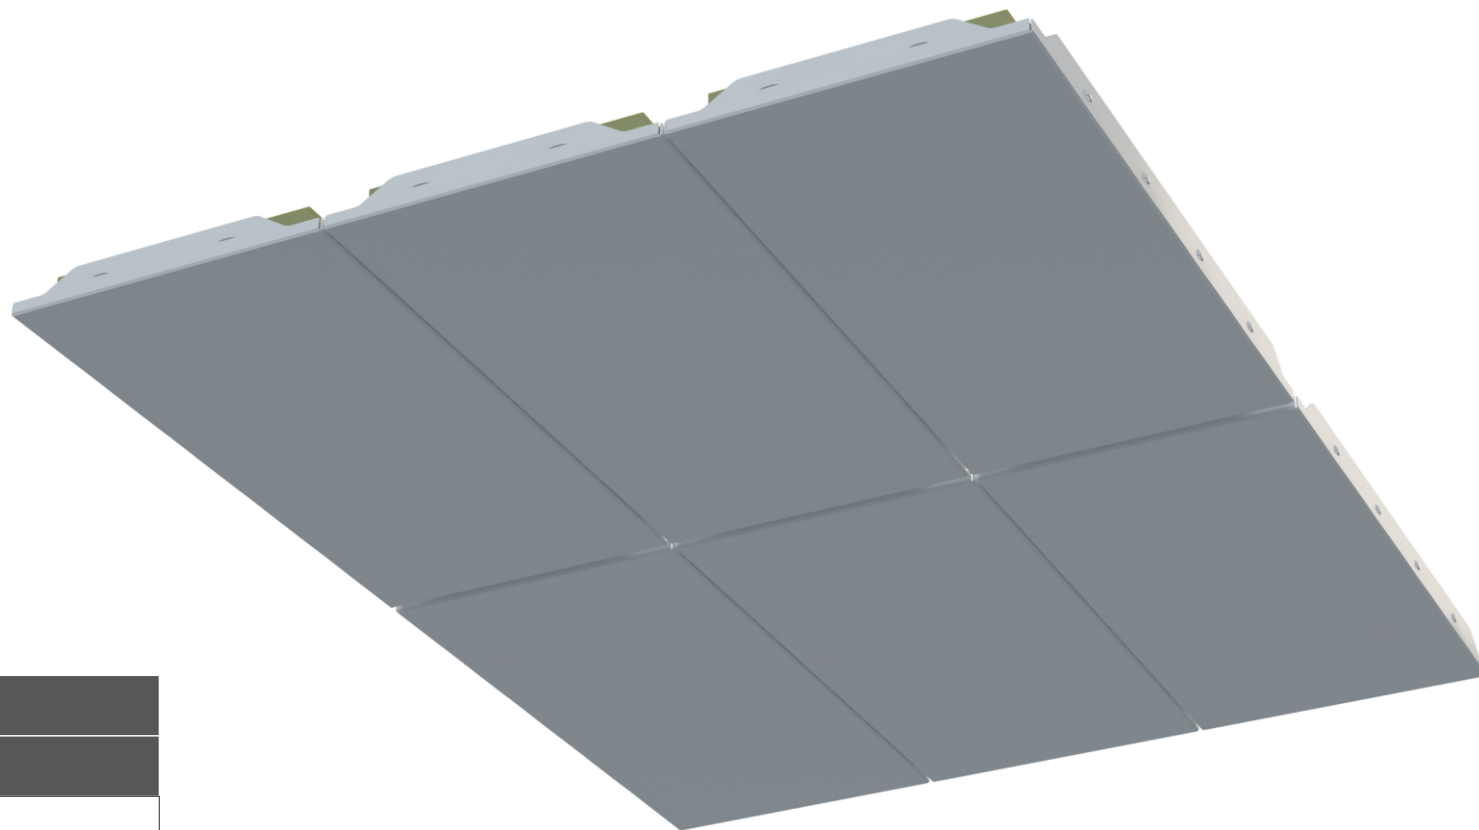


TILE PANEL	
MODEL	B11-614
DESCRIPTION	
Type	
Fire class	B15
Standard width	750 mm
Module length	up to 900 mm
Thickness	40 mm
Weight	5,96 kg/m ²
Sound reduction	n/a
Insulation	130 kg/m ³
Visible surface	PVC or powder coated*, stainless steel
Application	Ceiling Metal, quick assembly/disassembly

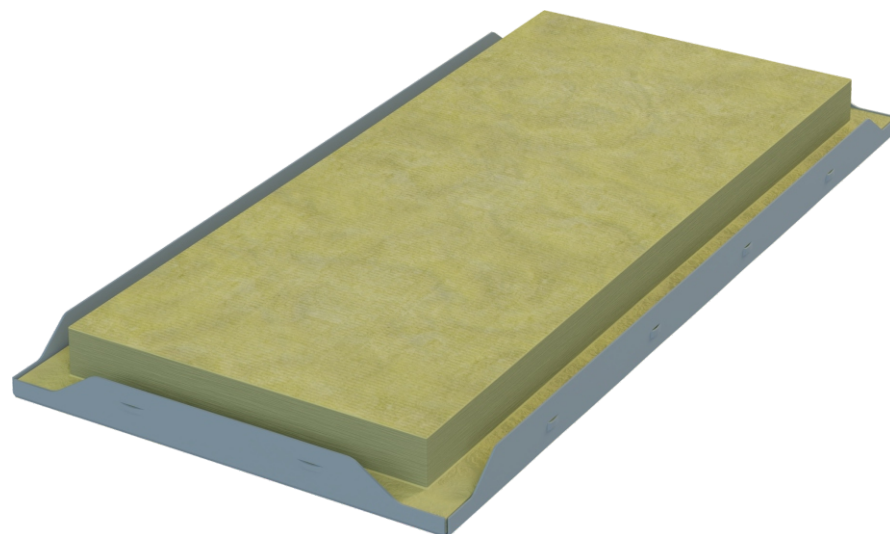


* According to RAL or NCS colors

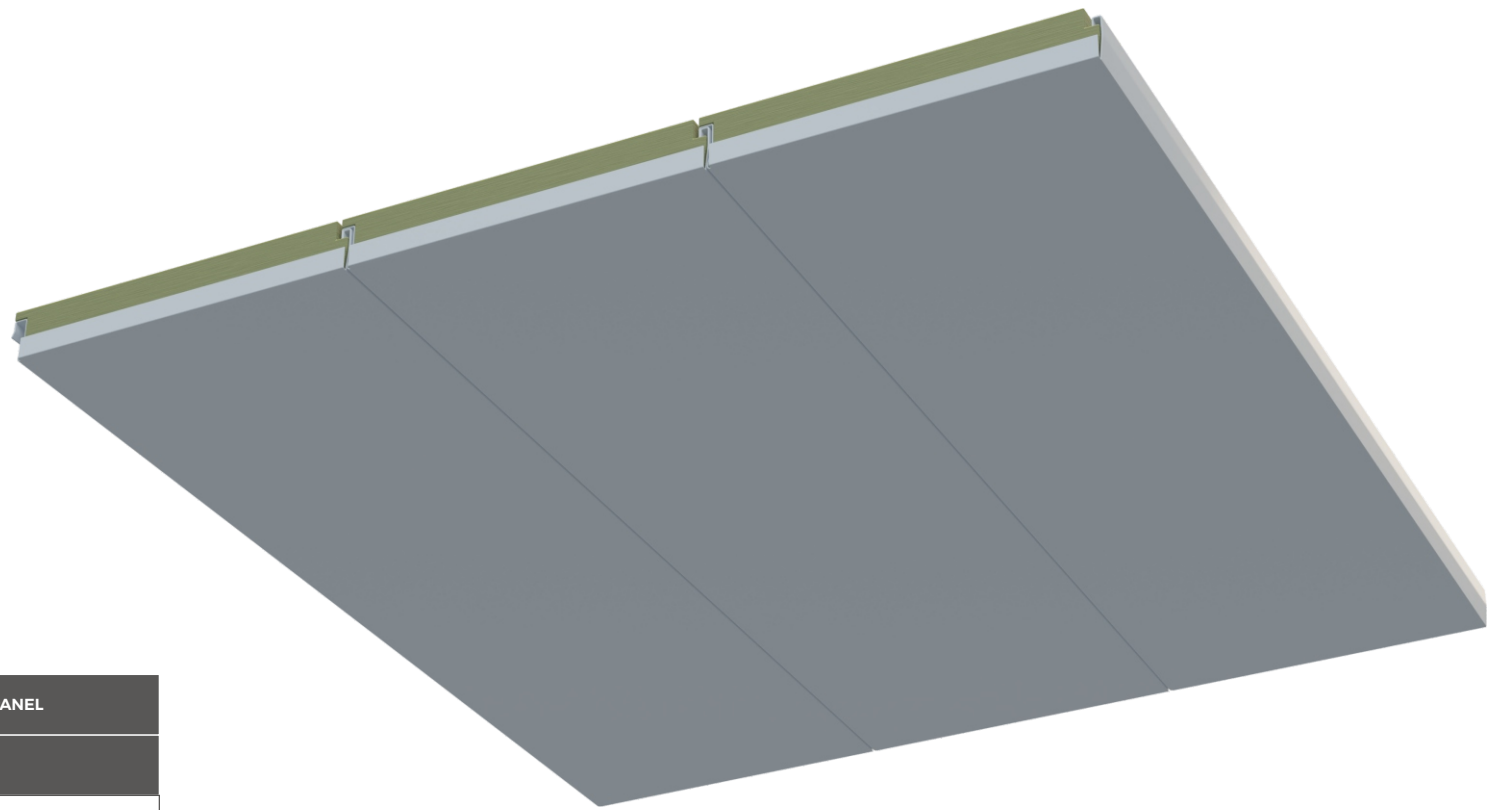


SELF-SUPPORTING PANEL	
MODEL	B13-500
DESCRIPTION	
Type	B13-501
Fire class	B15
Standard width	300 mm
Module length	up to 2700 mm
Thickness	50 mm
Weight	11,88 kg/m ²
Sound reduction	n/a
Insulation	140 kg/m ³
Visible surface	PVC or powder coated*, stainless steel
Application	Ceiling Metal, quick assembly/disassembly

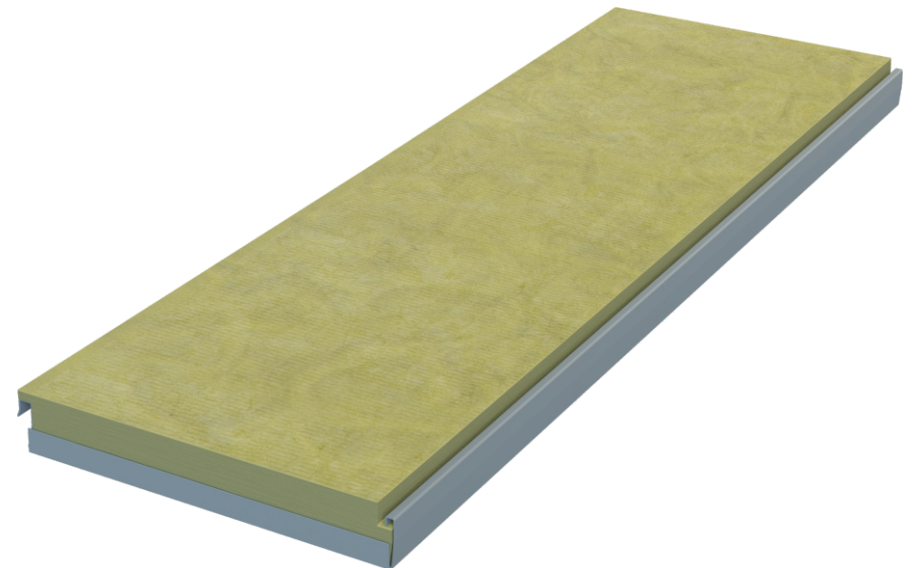


* According to RAL or NCS colors

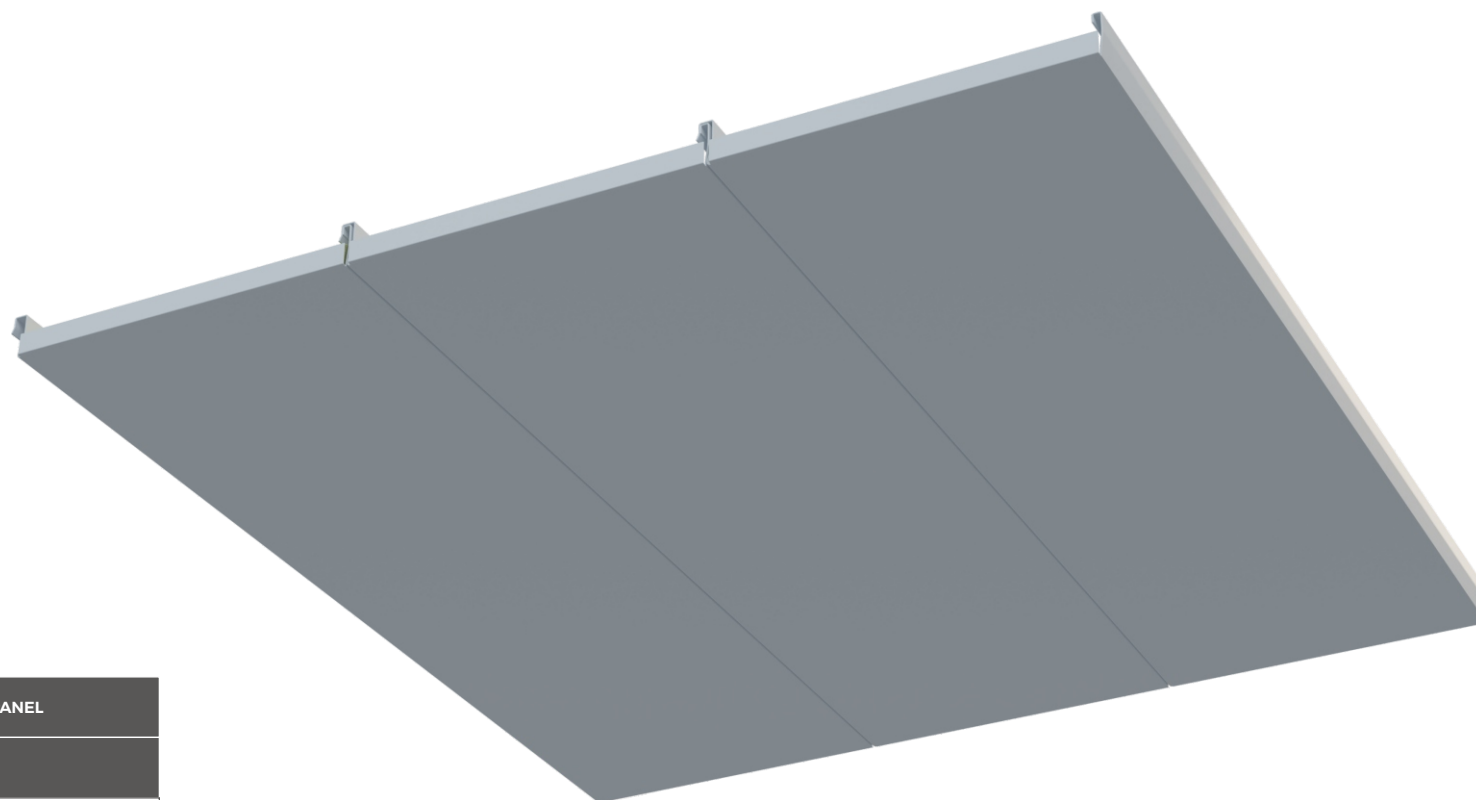


SELF-SUPPORTING PANEL	
MODEL	B13-500
DESCRIPTION	
Type	B13-503
Fire class	B0
Standard width	300 mm
Module length	up to 3000 mm
Thickness	39 mm
Weight	9,24 kg/m ²
Sound reduction	n/a
Insulation	110 kg/m ³
Visible surface	PVC or powder coated*, stainless steel
Application	Ceiling Metal, quick assembly/disassembly

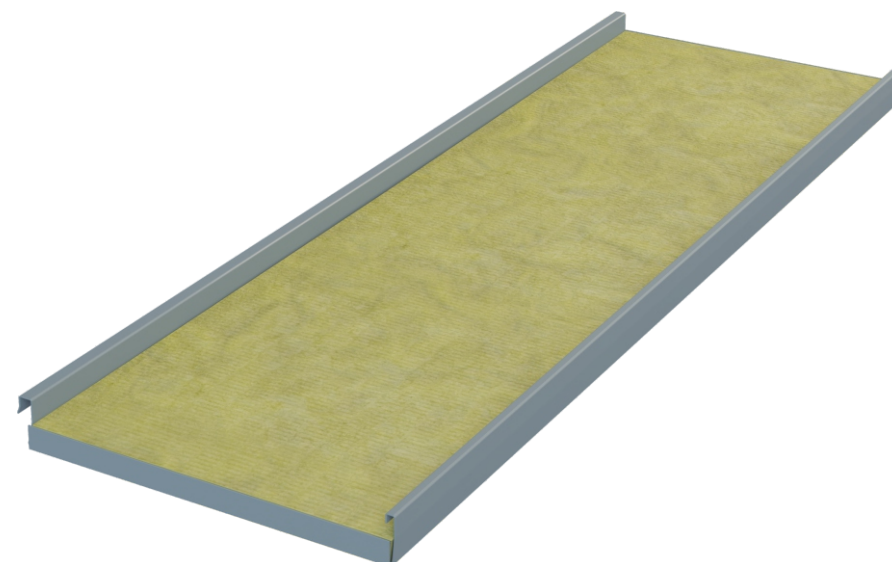

* According to RAL or NCS colors

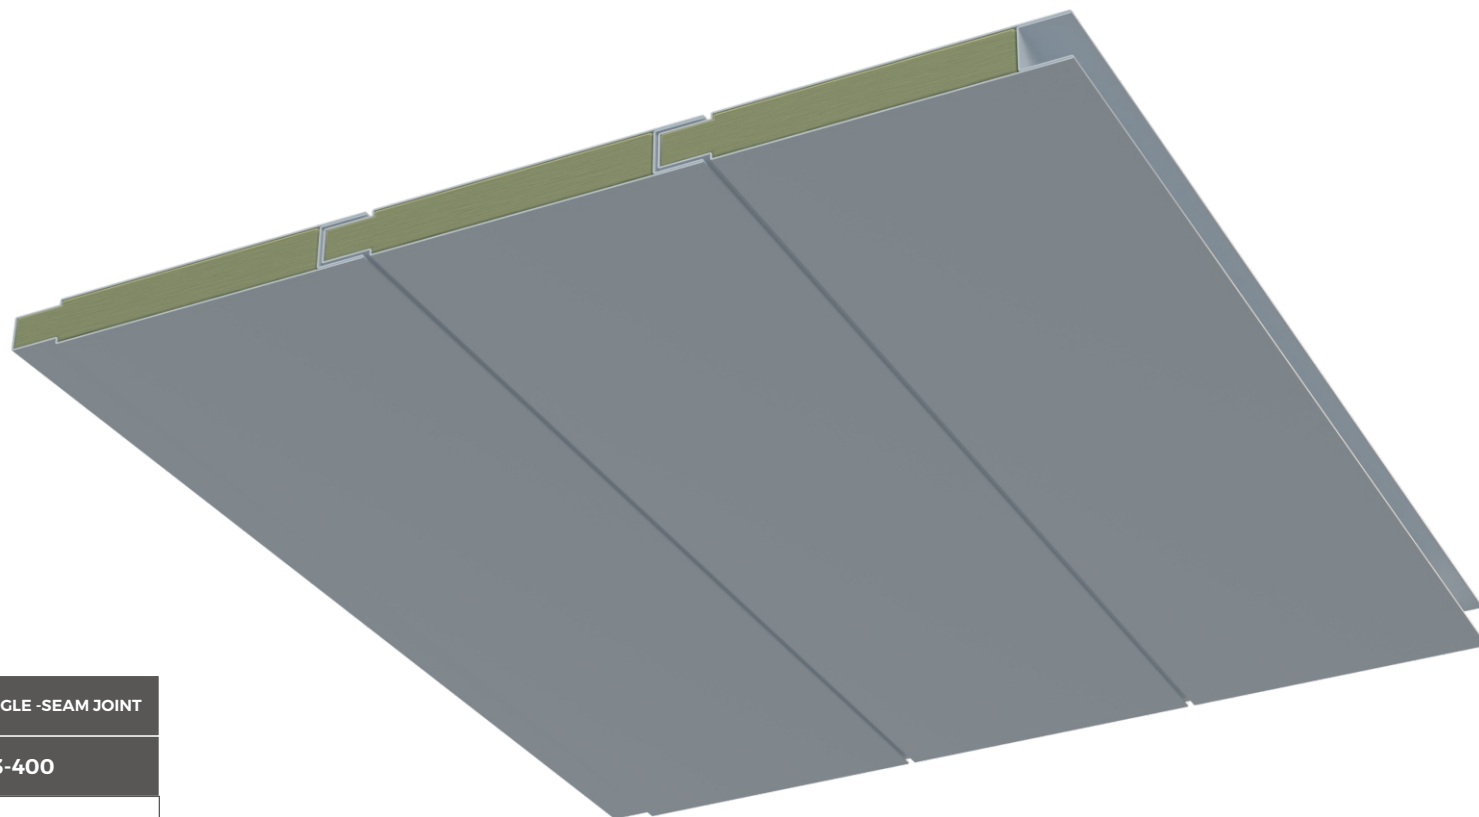

INTEGRATED JOINT PANELS / SINGLE -SEAM JOINT	
MODEL	B13-400
DESCRIPTION	
Type	
Fire class	B15
Standard width	600 mm
Module length	up to 3000 mm
Thickness	50 mm
Weight	18,0 kg/m ²
Sound reduction	n/a
Insulation	130 kg/m ³
Visible surface	PVC or powder coated*, stainless steel
Application	Ceiling Metal, quick assembly/disassembly

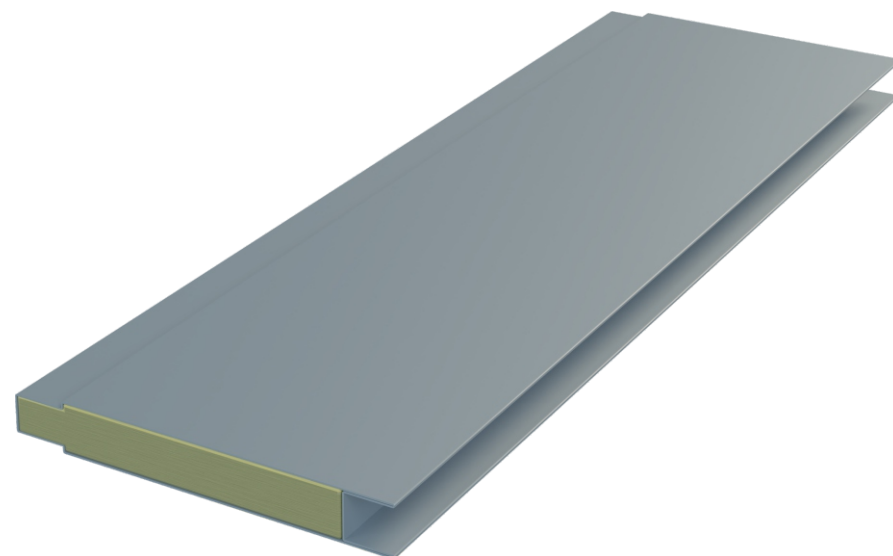

* According to RAL or NCS colors

COMMERCIAL

Andrzej Urban
Sales Manager
a.urban@sec-systems.pl
+48 797 026 441

Dominik Warembier
Channel Sales Manager
d.warembier@sec-systems.pl
+48 510 895 976

PURCHASING

Konrad Zielke
Purchasing Manager
k.zielke@sec-systems.pl
+48 668 486 690

PRODUCTION

Łukasz Janikowski
Site Manager
l.janikowski@sec-systems.pl
+48 602 419 675

Izabela Rajewska
Production Manager
i.rajewska@sec-systems.pl
+48 882 744 524

OFFICE:

ul. prof. W. Andruszkiewicza 5
80-601 Gdańsk

PRODUCTION

ul. Gdańska 37
83-200 Starogard Gdański

Poland

+48 587 316 720
info@sec-systems.pl

