


B15 RATED WALL SYSTEM

Tongue and groove joint with bottom V symmetrical slot

TYPE
B-13-064

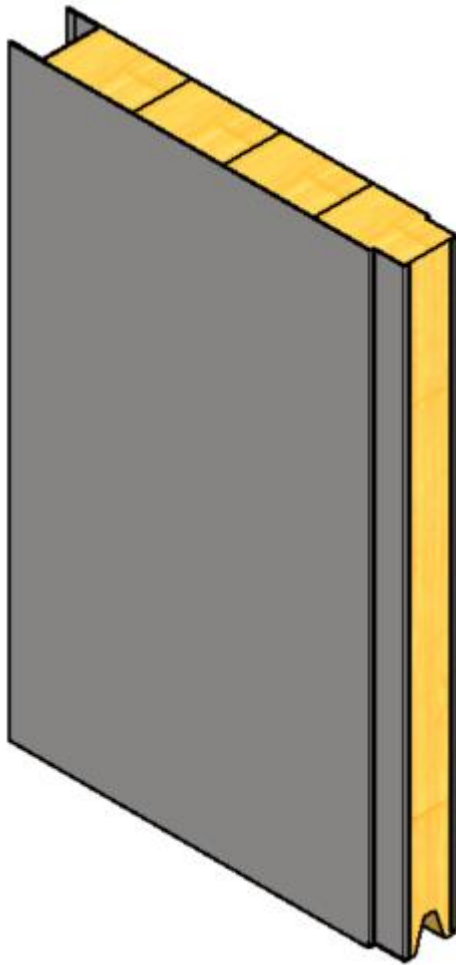

GENERAL INFORMATION:

Fire class: B15

Standard panel width (B): 300, 450, 600 mm

Panel width (possible options) :

- 150-600 mm* (B15 certified)
- up to 1000 mm* (non- certified)


Standard panel height (H):

- up to 2600 mm* (B15 certified)
- up to 3000 mm* (non- certified)


Mass: 25mm – 16,5 kg/ m²
50 mm – 19,2 kg/m²

Est. Sound red. (Rw):

CROSS-SECTION:

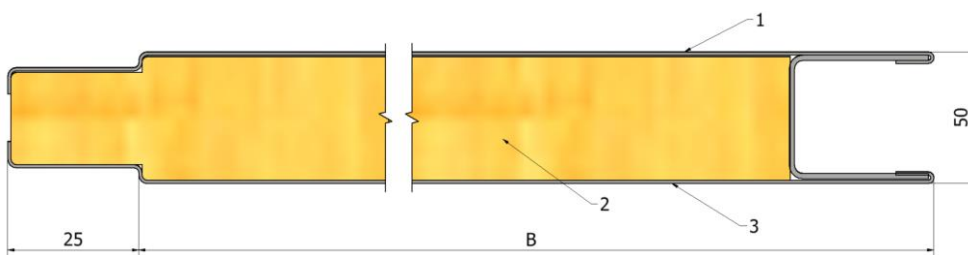


JOINING METHOD:

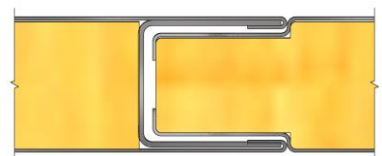

PRODUCT CODE:

B-13-061	- B15	- 25	- 600x2000	- Galv	- 9010	- Galv
TYPE	FIRE RATE	THICKNESS	SIZE BxH	MATERIAL	1. FINISH	2. FINISH

BOTTOM SIDE:

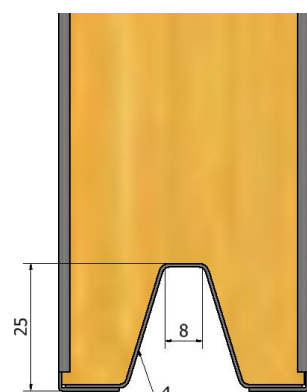

MATERIAL:

1. Galvanized steel 0,6 mm
(Stainless steel 0,6 mm)
2. Mineral wool density 175 kg/m³
3. Galvanized steel 0,6 mm
(Stainless steel 0,6 mm)
4. Profile - Galvanized steel 1,0 mm
(Stainless steel 1,0 mm)

FINISHING:

- RAL
- PVC Foil
- Galvanized steel
- Stainless steel

*For more information, contact us.