


# B15 RATED WALL SYSTEM

Standard tongue and groove joint

# TYPE B-13-060

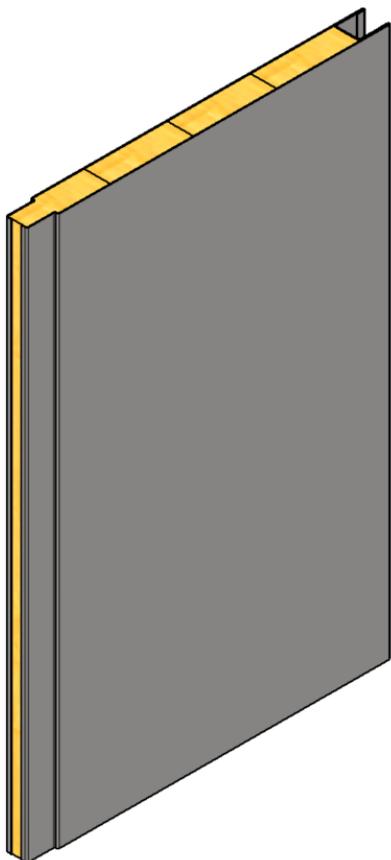

## GENERAL INFORMATIONS:

Fire class: B15

Standard panel width (B): 300, 450, 600 mm

Panel width (possible options) :

- 150-600 mm\* (B15 certified)
- up to 1000 mm\* (non- certified)


Standard panel height (H):

- up to 2600 mm\* (B15 certified)
- up to 3000 mm\* (non- certified)


Mass: 25mm – 14,2 kg/ m<sup>2</sup>  
50 mm – 18,2 kg/m<sup>2</sup>

Est. Sound red. (Rw): 25mm – 31 dB  
50mm – 32 dB

## CROSS-SECTION:

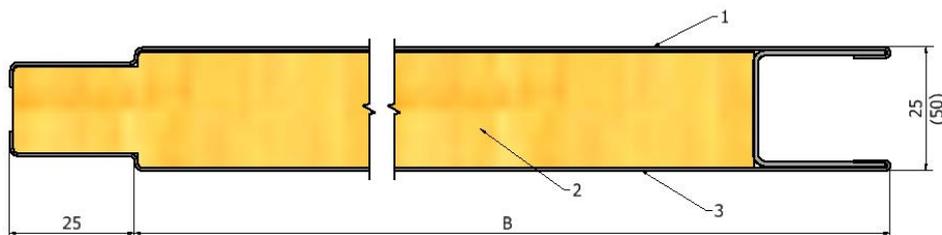

## JOINING METHOD:

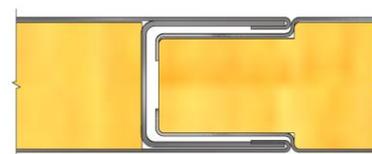

## PRODUCT CODE:

**B-13-060 - B15 - 25 - 600x2000 - Galv - 9010 - Galv**

TYPE	FIRE RATE	THICKNESS	SIZE BxH	MATERIAL	1. FINISH	2. FINISH
B-13-060	B15	25	600x2000	Galv	9010	Galv

## MATERIAL:

- Galvanized steel 0,6 mm (Stainless steel 0,6 mm)
- Mineral wool density 175 kg/m<sup>3</sup>
- Galvanized steel 0,6 mm (Stainless steel 0,6 mm)

## FINISHING:

- RAL
- PVC Foil
- Galvanized steel
- Stainless steel